


# IBX-200-9102G4

Fanless Communication Application Embedded System, Intel® Celeron® M 1.0GHz with 910GMLE & 4 ports Ethernet



- 1 x console DB-9
- 2 x 10/100 LAN
- 2 x GbE LAN
- 2 x USB 2.0
- DC 12V inlet

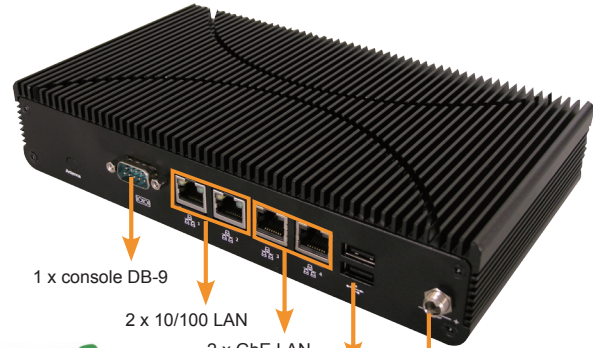


## Specifications

<b>Model Name</b>	IBX-200-9102G4
<b>CPU (on-board)</b>	Intel® Celeron® M 1.0GHz with 512KB L2 cache (processor 373)
<b>Chipset</b>	Intel® 910GMLE + ICH6M
<b>RAM</b>	1 x DDR2 SO-DIMM slot up to 1GB
<b>LAN</b>	2 x Giga-LAN RJ45 (Intel® 82537L) 2 x 10/100 LAN RJ45 (Intel® 82551ER + 82562ET)
<b>USB</b>	2 x USB 2.0
<b>COM</b>	1 x DB-9 console
<b>Driver Bay</b>	1 x 2.5" SATA HDD 1 x Type II CF card
<b>Support OS</b>	Windows XP
<b>LED function</b>	10 x LED on Front Panel for System Power /storage , LAN active / link
<b>Power input</b>	DC 12V input
<b>Power adapter</b>	AC 100~240V input to DC 12V output
<b>Chassis Construction</b>	Aluminum Chassis
<b>Dimensions (WxDxH)</b>	223 mm x 125 mm x 46 mm
<b>Operation Temperature</b>	0°C~50°C with CompactFlash 0°C~40°C with hard drive
<b>Safety &amp; EMC</b>	CE , FCC class A

## Features

- Cost-Effective solution best for SOHO communication application.
- Fanless & small form factor design with low power consumption.
- Four ports Ethernet connections.
- Supports CompactFlash Type II & 2.5" SATA HDD.

## Dimensions (mm)

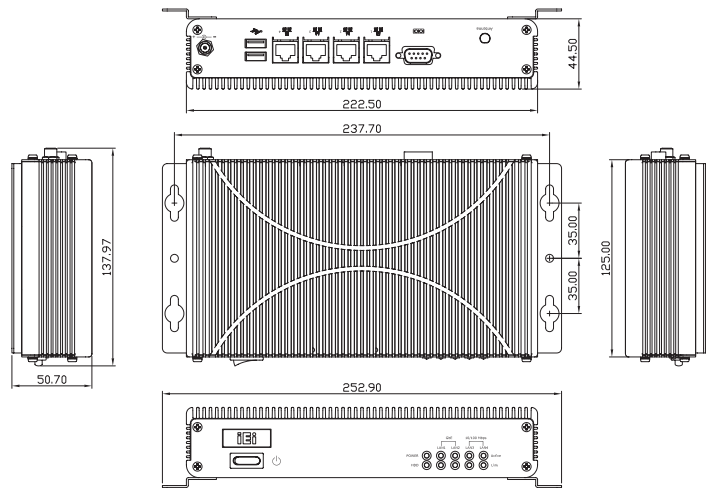

## Ordering Information

Part No.	Description
IBX-200-9102G4-R10/CM373/512MB	Fanless Embedded System, Intel® 910GMLE chipset, Celeron® M 1.0GHz 512K L2 cache (373) ,512MB DDR2 SO-DIMM , power adaptor ,RoHS

## Packing List

- 2 x wall mount bracket
- 4 x plastic foot pad with screws
- 1 x Power cord
- 1 x 60W power adaptor
- 1 x HDD SATA & power cable
- 1 x User manual & Driver CD